



## **Smart Bidet Seat Toilet Suite**



Tel : 03 9998 0999      Email: [sales@hellokitchen.com.au](mailto:sales@hellokitchen.com.au)

**[www.hellokitchen.com.au](http://www.hellokitchen.com.au)**

# INSTALLATION MANUAL

Model: SL620D







## INTELLIGENT TOILET

# P-TRAP Installation Manual

## 1 Cautions for safety. Please observe the following rules.

\*\*The following symbols are used to indicate important safety instructions for the use of the product.

	<b>Danger</b> Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
	<b>Warning</b> Indicates dangerous situations where the user could suffer death or serious injury if this product is used incorrectly.
	<b>Do not dismantle</b> Indicates not to dismantle this product.
	<b>Observe strictly</b> Indicates to observe the following precaution before using this product.

**\* Tip:** When you have multiple smart toilets, set them to different channels for remote control.

**Setting channel steps:**

1. Please plug in the toilet.

2. Press the STOP button on the toilet panel, hold down the button.

3. Meanwhile press MALE CLEANING button to change the channel.

4. There are 8 channels for you to choose, you can hear different beep on different channels. Choose one of them.

5. Take out the remote control, hold down the two buttons "+" and "-" until hearing the beep, release the buttons immediately. Channel setting is complete.

**\* Note:** Press the "CHOOSE" button for 3 seconds to open or close the motion sensor.

## Accessories



Water shutoff valve




Constant pressure valve



Battery box


## 2 Install the Battery box

Put the battery in the battery box, then connect the Battery box to the toilets.



## 3 P-trap installation


Adjust the position of the toilet drain outlet, and then connect the toilet to the wall.

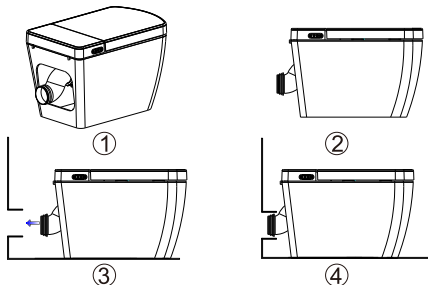

#### 4 Install shutoff valve


1. Close the main water supply
2. Wind Teflon tape around water shutoff valve
3. Connect the shutoff Valve, tighten up with wrench.
4. Connect the constant pressure valve.

Note: After installing the shutoff Valve, please turn on the water supply and Valve to flush the dirt for 30s and check whether there is a leakage.

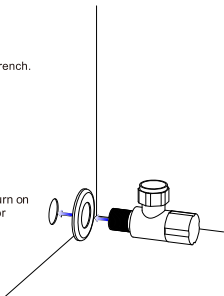

#### 5 Connect the hose


Fix the hose to the Constant pressure valve



#### 6 Apply glass glue.

1. Flush the toilets and find whether there is a leakage with a paper.

2. Water may get into the part between the lower end of the toilet and the floor and leave stain. Apply glass glue (Not Concrete) to prevent water penetration.


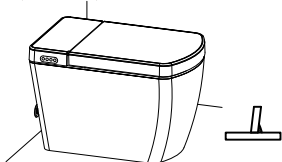


#### 7 Connect Power



1. Insert the power plug into the outlet

2. Turn on the shutoff valve.



3. Press the flush button on the remote control to do a test.

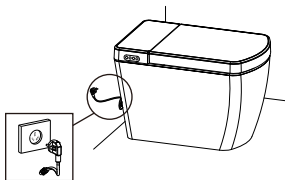



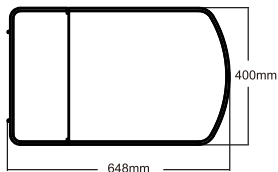
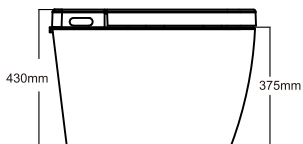


### Floor drain S-Trap (Standard services/Concealed services)



PS:SL:150mm 240mm 300mm 400mm  
S:160mm 240mm 300mm 400mm  
R:165mm 230mm 300mm 400mm

### Wall drain P-Trap (Standard services/Concealed services)



Diameter of Water Outlet	1½" G	Inlet Water Hose Length	60cm	Length of Power Cord	100cm
Water Pressure	Minimum 150kPa, Maximum 750kPa, nominal fixed flush volume was 5L				
Electrical	Standard 10amp power point required				
Installation	To be carried out by a licensed plumber. Installation as per local region, council plumbing specifications and plumbing codes additional back flow device may be a requirement				

The position of the power outlet and water outlet can also be flexible according to the real situation.

# S-TRAP Installation Manual

## 1 Cautions for safety. Please observe the following rules.

\*\*The following symbols are used to indicate important safety instructions for the use of the product.

	<b>Danger</b>	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
	<b>Warning</b>	Indicates dangerous situations where the user could suffer death or serious injury if this product is used incorrectly.
	<b>Do not dismantle</b>	Indicates not to dismantle this product.
	<b>Observe strictly</b>	Indicates to observe the following precaution before using this product.

- ★ **Tip:** When you have multiple smart toilets, set them to different channels for remote control.
- Setting channel steps:**
1. Please plug in the toilet
  2. Press the STOP button on the toilet panel, hold down the button.
  3. Meanwhile press MALE CLEANING button to change the channel
  4. There are 8 channels for you to choose, you can hear different beep on different channels. Choose one of them.
  5. Take out the remote control, hold down the two buttons "▲" and "▼" until hearing the beep, release the buttons immediately. Channel setting is complete.

★ **Note:** Press the "CHOOSE" button for 3 seconds to open or close the motion sensor

## Accessories



Flange(option)



Constant pressure valve




Water shutoff valve



Battery box



## 2 Install the Battery box

Put the battery in the battery box, then connect the Battery box to the toilets.



## 3 Install the Flange on the floor

1. Fix the flange on the bottom
2. Connect the toilet with flange to the drain pipe on the floor
3. Slightly press the toilets after the toilet connected to make the connection more better.




Note: The expansion pipe type toilets do not need flange, just connect the Drain pipe directly.

#### 4 Install shutoff valve


1. Close the main water supply
2. Wind Teflon tape around water shutoff valve
3. Connect the shutoff Valve, tighten up with wrench.
4. Connect the constant pressure valve.

Note: After installing the shutoff Valve, please turn on the water supply and Valve to flush the dirt for 30s and check whether there is a leakage.




#### 5 Connect the hose

Fix the hose to the Constant pressure valve



#### 6 Apply glass glue.

1. Flush the toilets and find whether there is a leakage with a paper.
2. Water may get into the part between the lower end of the toilet and the floor and leave stain. Apply glass glue (Not Concrete) to prevent water penetration.



#### 7 Connect Power

1. Insert the power plug into the outlet
2. Turn on the shutoff valve.
3. Press the flush button on the remote control to do a test.

